

# ACCURL CNC PRESS BRAKE SMART-FAB B SERIES

ACCURL design innovations are based on years of experience and have resulted in Smart-Fab series Press Brakes which allow for faster bending, and a better return and back gauge. Accurl Press Brakes will allow you to mass produce precision parts effectively and decrease your cost per part.



## STANDARD CONFIGURATION

- DELEM DA58T 2D graphical operator control
- Y1/Y2 synchro pressbrake
- X - Axis backgauge , programmable in 0.01mm increments
- CNC controlled hydraulic Anti deflection table (crowning)
- Programmable, angle, depth and TDC positioning
- European style quick release clamping for top tools
- Full set of top and bottom tooling
- 2 Front supports
- CE Safety specifications

DELEM DA-58T

# 15"

Touch-screen display

The setup of the machine and the bending test are minimized by means of a fast and simple program-production sequence. The CNC programs are called up with a single touch.

## OPTIONAL EQUIPMENT

- DELEM DA52s CNC System
- DELEM DA66T CNC System
- Backgauge X-R or X-R-Z1/Z2
- DSP Optical Safety Guard
- 1000ram backgauge stroke




[www.nofermaq.cl](http://www.nofermaq.cl)

**NOFERMAQ**  
Tecnología & Seguridad para la Industria

## STANDARD EQUIPMENT




CE Confirmation with Laser Safe

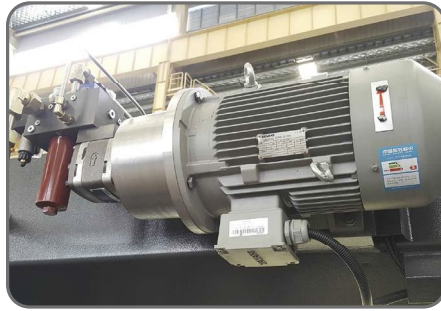

Siemens Main Motor



Delta Servo Drive

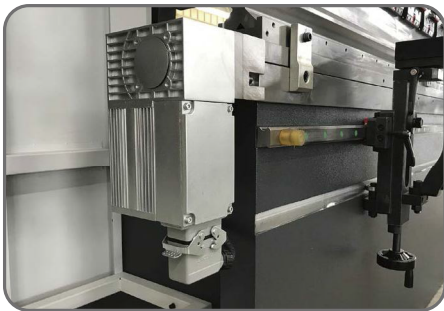

CNC Crowing System



Front Arm with Linear Guide



Back Gauge with Linear guide

## SPECIFICATIONS

Type	Bending Length mm	Bending Capacity KN	Distance between side frames mm	Gap mm	Daylight Opening mm	Stroke mm	Table Height mm	Table Width mm	Fast Approach Speed mm/s	Max. Bending Speed mm/s	Return Speed mm/s	Motor Power kw	Length+/- mm	Width+/- mm	Height+/- mm	Weight+/- kg	Backgauge stroke mm
B 1563	1500	630	1100	370	350	200	870	80	200	10	160	5.5	1825	1650	2600	4600	750
B 2563	2500	630	2060	370	350	200	870	80	200	10	160	5.5	2825	1650	2430	5600	750
B 32110	3200	1100	2700	400	430	200	940	100	200	10	160	7.5	4200	1800	2630	8000	750
B 40110	4000	1100	3300	400	430	200	940	100	200	10	160	7.5	4800	1800	2700	9500	750
B 32135	3200	1350	2700	400	430	200	940	100	200	10	160	11	4200	1800	2660	8800	750
B 40135	4000	1350	3300	400	430	200	940	100	200	10	160	11	4800	1900	2700	10000	750
B 32175	3200	1750	2700	400	430	200	940	100	180	10	140	11	4200	1900	2700	10000	750
B 40175	4000	1750	3300	400	430	200	940	100	180	10	140	11	4500	1900	2750	12000	750
B 32220	3200	2500	2700	400	470	200	950	140	180	10	140	18.5	4200	1800	2900	15000	750
B 40220	4000	2200	3300	400	470	200	1050	140	180	10	140	18.5	5000	1800	3000	17000	750
B 32250	3200	2200	2700	400	500	250	1080	180	160	10	140	22	4300	2000	3180	16000	750
B 40250	4000	2500	3300	400	500	250	1080	180	160	10	140	22	4900	1730	3180	18000	750
B 30300	3200	3000	2700	400	560	300	1160	180	120	8	85	22	4300	2150	3360	20000	750
B 40300	4000	3000	3300	400	560	300	1160	180	120	8	85	22	4900	2150	3360	20000	750
B 50300	5000	3000	4050	400	4560	300	1180	180	120	8	85	18.5	5300	2250	3320	26000	750
B 40400	4000	4000	3300	450	400	320	880	200	120	8	80	30	4300	2200	3580	27000	750
B 50400	5000	4000	4050	450	400	320	880	200	100	8	80	30	5300	2250	3600	32000	750
B 60400	6000	4000	5050	450	400	320	880	200	100	8	80	30	6400	2300	3670	38000	750
B 60500	6000	5000	5050	450	610	320	990	300	100	8	75	37	6500	2700	5000	55000	1000
B 60600	6000	6000	5050	450	650	320	990	300	80	8	80	40	6500	2700	5000	65000	1000